

VULCAN BULLET MARKERS

The Vulcan Bullet Marker provides a 360° warning message that is sure to demand attention. Various color combinations of bullet heads and poly posts can specify water, sewer, gas, petroleum or fiber optic lines below, while also complimenting your company's colors. The bullet head and post are manufactured from specially formulated, UV protected High Density Polyethylene (HDPE), which makes Vulcan Bullet Markers the ultimate choice for outdoor durability. Multiple anchor options are also available for this product to ensure maximum stability.

PRODUCT DATA




YELLOW SCREEN PRINTED BULLET HEAD ON WHITE POLY POST

VENTED BULLET HEAD



- DESIGNED TO FIT OVER AND ATTACH TO A STANDARD 3 1/2" OR 2 3/8" OD RISER PIPE
- ALLOWS FOR DETECTION OF GAS LEAKS
- INSIDE DIAMETER 3.75" FOR THE 3 1/2" RISER
- INSIDE DIAMETER 2.5" FOR THE 2 3/8" RISER

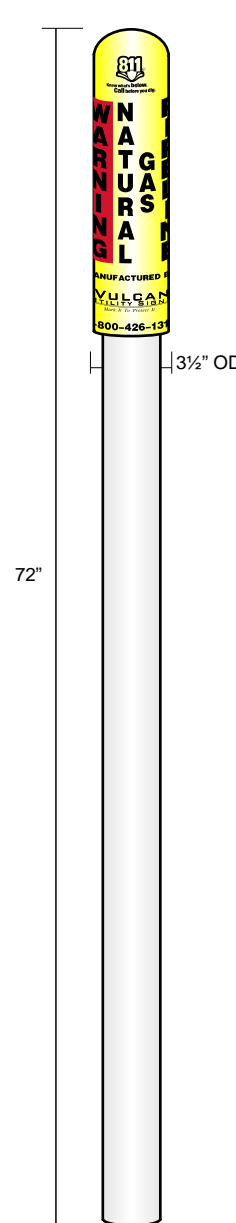

GRAPHIC DETAIL FOR SAMPLE BULLET TOP

VULCAN BULLET MARKERS

TECHNICAL SPECIFICATIONS

BULLET COLORS

- WHITE, YELLOW, ORANGE, RED AND BLUE
- CUSTOM COLORS ALSO AVAILABLE

PIPE COLORS

- YELLOW, BLUE, WHITE AND ORANGE
- CUSTOM COLORS ALSO AVAILABLE

LENGTHS

- STANDARD LENGTHS ARE 6' AND 8'
- CUSTOM LENGTHS ALSO AVAILABLE

| MATERIAL | HIGH DENSITY POLYETHYLENE (HDPE) |
|---------------------------------|----------------------------------|
| DENSITY | .952 TO .953 |
| LINEAR EXPANSION | 12 |
| ELONGATION AT BREAK (%) | 150 |
| STRAIN AT YIELD (%) | 15 |
| WATER ABSORPTION (%) | 0.02 |
| OXYGEN INDEX (%) | 17 |
| FLAMMABILITY UL94 | HB |
| VOLUME RESISTIVITY (LOG OHM.CM) | 17 |
| DIELECTRIC STRENGTH (MV/M) | 22 |
| DISSIPATION FACTOR 1\KHZ | 2.3 |
| HDT @ 0.45 MPA (C) | 75 |
| HDT @ 1.80 MPA (C) | 46 |
| MELTING TEMPERATURE | 220-310 CENTIGRADE |



MADE IN THE USA