

VULCAN UTILITY SIGNS

Mark It To Protect It

VULCAN DURABLE I.D. SYSTEM

The versatile Durable I.D. System from Vulcan has numerous options to match your identification needs. These fit-for-purpose identifiers are made from stainless steel and are designed to be mounted securely to flanged fittings that exist on above ground pipe components such as valves, meters, filters, regulators, mile posts, etc.

Product Data:





HORIZONTAL-MOUNT
CUT-OUT IDENTIFIER (TABS OFF)



VERTICAL-MOUNT
ENHANCED IDENTIFIER

3-4 DIGIT IDENTIFIER

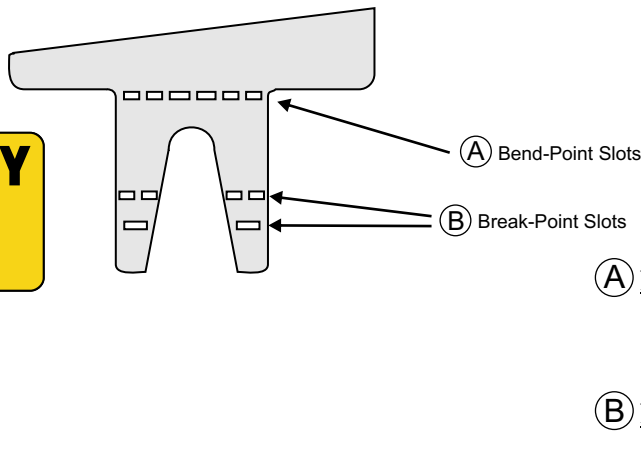

MADE IN THE USA

> MANUFACTURED USING:

- 304 Stainless Steel for protection against corrosion.
- Stainless Steel is 14 Gauge with a thickness of .08".

> TWO STYLES ARE AVAILABLE:

- Cut-Out Durable Identifier
- Enhanced Durable Identifier

> CUT-OUT DURABLE IDENTIFIER

- Laser-cut characters in a stencil-style font.
- Do not have to be removed when maintenance painting occurs.


> ENHANCED DURABLE IDENTIFIER

- Utilizes outdoor durable, reflective vinyl.
- Different color combinations available. See below.



(A) Bend-Point Slots: A series of precisely lasered slots allow bending of the face at the job site in order to affix the identifier in virtually any position.

(B) Break-Point Slots: The forked end has additional laser slots that allow length reduction where a flange may interfere. Simply bend legs back and forth at break-point slots, until tab breaks off (pliers required).



VULCAN
UTILITY SIGNS

Mark It To Protect It

VULCAN DURABLE I.D. SYSTEM

Technical Specifications:

Stainless Steel Coil, Cold Rolled, Annealed and Pickled. Material free from mercury contamination. No weld repairs.

MATERIAL	304 STAINLESS STEEL
FINISH	2B
CORROSION	ASTM A262

<u>MECHANICAL PROPERTIES</u>	
UTS/KSI	95.30
.2% YS KSI	46.75
ELONGATION %-2"	48.97
HARD RB	86.50
TAIL H TAIL	88.00

<u>CHEMICAL ANALYSIS</u>	
HEAT	56F6
C	.066
CR	18.639
CU	.266
MN	1.659
MO	.237
N	.075
NI	8.133
P	.026
S	.003
SI	.398